

CON-SERV




MANUFACTURING

Standard are the Obvious Con-Serv Qualities:

User Friendly ■ Quality Construction ■ Performance ■ Low Cost to Operate ■ Inexpensive to Purchase

8" Reverse Osmosis Membranes

TM-SERIES ELEMENT

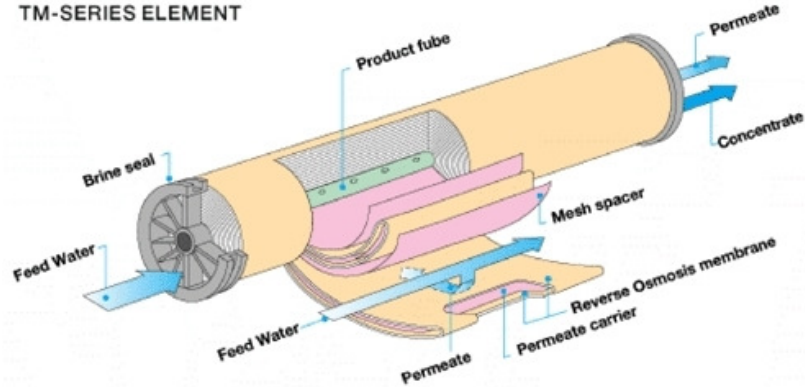

REVERSE OSMOSIS MEMBRANES

Part #	TYPE	Diameter	Membrane Area ft ² (m ²)	SALT REJ %	PRODUCT FLOWRATE gpd(M ³ /D)	FEED WATER CONC. MG/L NaCl
TML20-370	BRACKISH	8"	370 (34)	99.7	9500 (36.0)	2000
TML20-400	BRACKISH	8"	400 (37)	99.7	10200 (38.6)	2000
8040-HR-375	BRACKISH	8"	375 (34.8)	99.55	10200 (38.6)	2000
8040-HR-400	BRACKISH	8"	400 (37.2)	99.55	11000 (41.6)	2000
ESPA 1	BRACKISH	8"	400 (37.1)	99.3	12000 (45.4)	1500
ESPA 2	BRACKISH	8"	400 (37.1)	99.6	9000 (34.1)	1500
ESPA 4	BRACKISH	8"	400 (37.1)	99.2	12000 (45.4)	500
8040-FR-375	BRACKISH (FOULING RESISTANT)	8"	375 (34.8)	99.55	10200 (38.6)	2000
ESPA 2-LD	BRACKISH (LOW FOULING)	8"	400 (37.1)	99.6	10000 (37.9)	1500
TMH20A-370	BRACKISH (ULTRA LOW PRESSURE)	8"	370 (34)	99.3	10200 (38.5)	500
TMH20A-400	BRACKISH (ULTRA LOW PRESSURE)	8"	400 (37)	99.3	11000 (41.6)	500
TMH20A-430	BRACKISH (ULTRA LOW PRESSURE)	8"	430 (40)	99.3	11800 (44.7)	500
TM820C-370	SEAWATER	8"	370 (34)	99.75	6000 (22.7)	32000
TM820C-400	SEAWATER	8"	400 (37)	99.75	6500 (24.6)	32000
TM820E-400	SEAWATER	8"	400 (37)	99.5	7500 (28.3)	32000
8040-SW-335	SEAWATER	8"	225 (31.1)	99.75	6000 (22.7)	32800
8040-SW-400	SEAWATER	8"	400 (37.2)	99.75	7200 (27.2)	32800
8040-HF-400	SEAWATER	8"	400 (37.2)	99.7	9500 (37.2)	32800
SWC 4+	SEAWATER	8"	400 (37.1)	93	6500 (24.6)	32000
SWC 5 MAX	SEAWATER	8"	440 (40.8)	92	9900 (37.5)	32000
SWC 5-LD	SEAWATER (LOW FOULING)	8"	400 (37.1)	92	9000 (34.1)	32000
8040-SR100-400	NANO FILTRATION	8"	400 (37.2)	99.65	7400 (28.0)	5000*
8040-SR100-330	NANO FILTRATION	8"	330 (30.7)	99.65	6100 (23.1)	5000*
8040-SR100-260	NANO FILTRATION	8"	260 (24.1)	99.65	4800 (18.2)	5000*

* MG/L MgSO4 IN DEIONIZED WATER



Additional Types are available